



## XStream Time Capsule

The X-Stream Time Capsule system supports XStream mini camera models XSM-3520, XSM-4K Veloce and XSM-5K (see max frame rates) to produce and record slow motion image streams. With 8TB of on-board storage, the system delivers concurrent LIVE and SLOW MOTION 12Gbit SDI outputs with simultaneous image transfer to a PC via 10Gbit Ethernet.

### Features

- Continuous Recording
- Advanced Paint Control
- Broadcast/Cine Ready

### MECHANICAL

Weight	1.88 kg or 4.14 lbs
Dimensions	243mm x 99mm x 127mm (W x H x L)

### OPERATING TEMPERATURE

0+40 °C / 32+104°F

### POWER

Input Voltage	24 VDC
Battery:	V-Lock Battery Power Supply

### COMMUNICATION INTERFACE

Ethernet 10G

### TRIGGERING AND SYNCHRONIZATION

Sync In, Sync Out, Ready: TTL level compatible, with 5V level signal  
Trig In: TTL level compatible, with 5V level signal, active "0"

### VIDEO


2x 12G SDI Ports  
Reference port for GenLock

### CONTROL

LANC port for LANC Controller



XStream Time Capsule

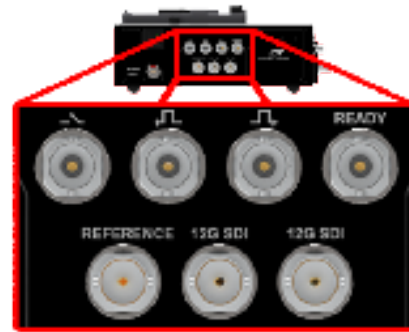

### CAMERA SUPPORT

4x USB-C Ports for XStream mini camera models listed below:

### CAMERA SUPPORT - MAX FRAME RATES

XStream mini XSM-3520 (HD mode)	2000 FPS
XStream mini XSM-4K Veloce	1,000 FPS
XStream mini XSM-5K (4K mode)	500 FPS